


S1/S2 Mini Condensate Pump

- Ultra-quiet DC motor
- Electrode water level sensor
- Reliable drainage



Quiet operation

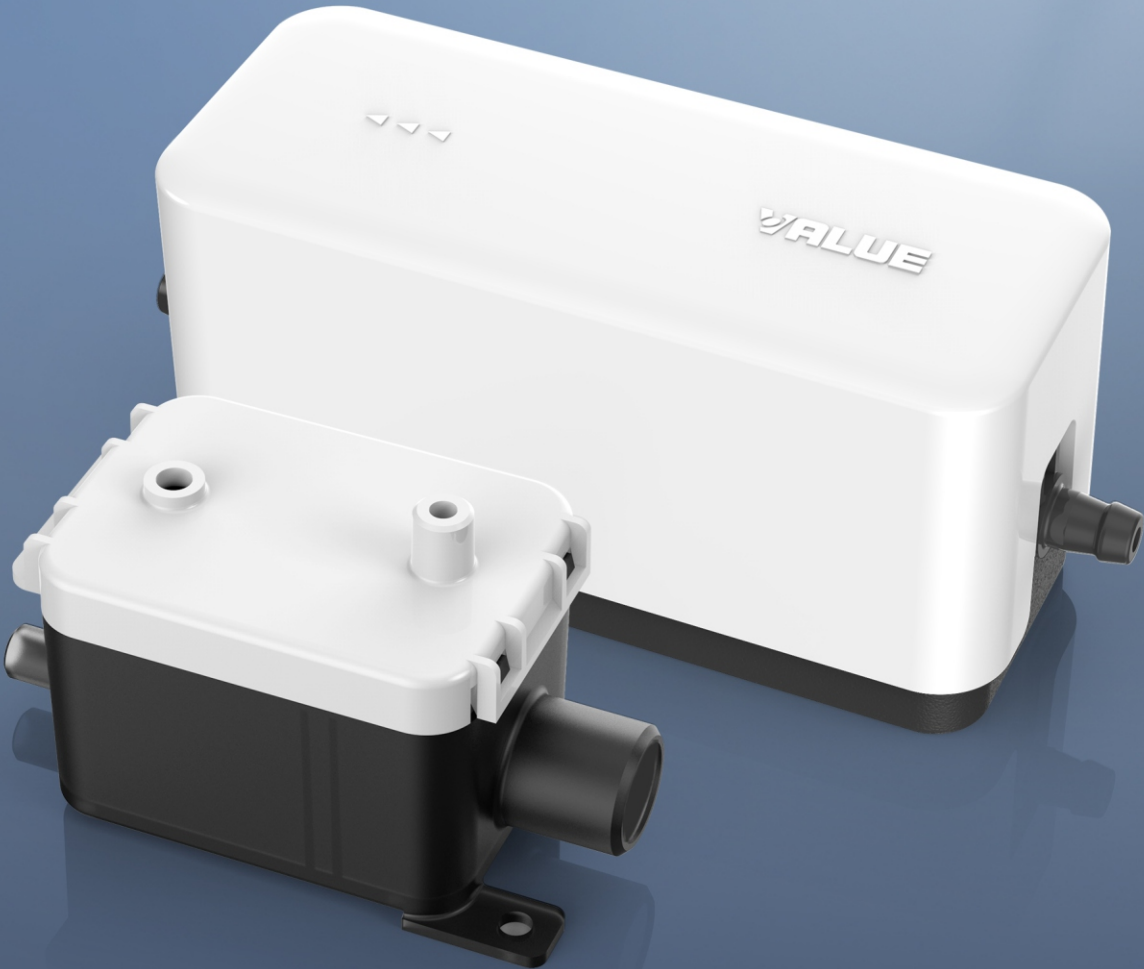

Small size



Electrode water
level sensor




24h Automatic
drainage




Built-in filter net


For the layout of the pump

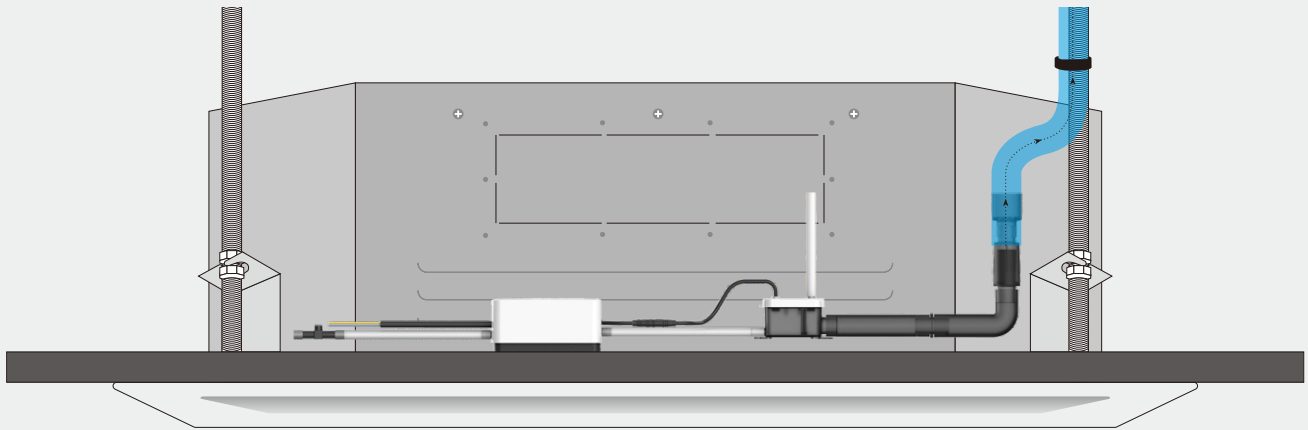

Dimensional Drawing (Unit:mm)

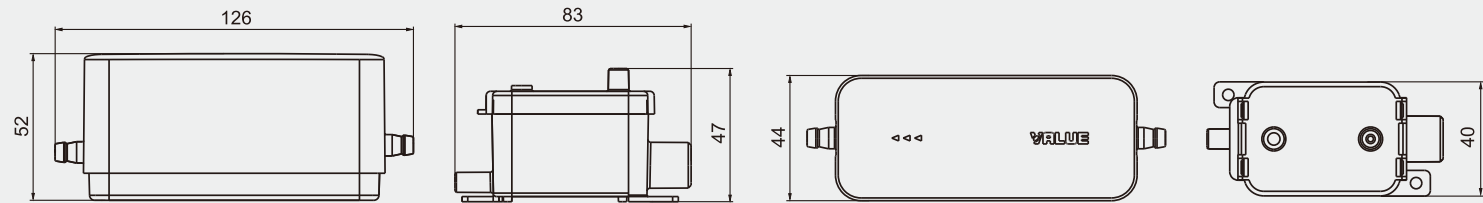

Flow Rate

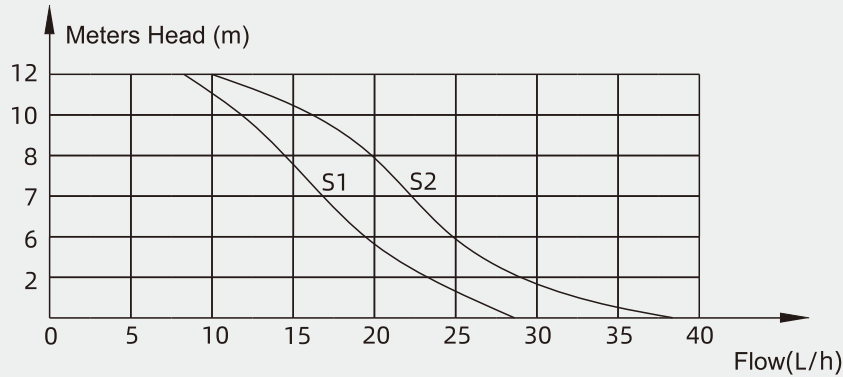

Technical Parameters

Model	S1	S2
Voltage	100-240V/50-60Hz	100-240V/50-60Hz
Discharge head (Max.)	10m/33t	10m/33t
Flow rate (Max.)	24L/h / 6.4 US GPH	40L/h / 10.6 US GPH
Effective water tank capacity	50ml	50ml
Unit output (Max.)	9kW / 30000btu/h	13kW / 45000btu/h
Noise at 1m	19dB(A)	21dB(A)
Applicable ambient Temperature	0°C~50°C	0°C~50°C